

Drop & Walk Selection

Magicfloor **Drop&Walk** vinyl tiles offer an ideal flooring solution especially for heavy-traffic areas. The most important feature of these tiles is that they can be installed without adhesive, as well. Furthermore Drop&Walk does not need any special surface treatment or special maintenance. Drop&Walk tiles with wooden patterns are a completely watertight and environmentally friendly floor covering type, which ensure comfort and design at the same time.

Specification according to EN 649

Characteristics	Standard	Unit	Result
Type of flooring	EN 649		synthetic floor covering with PUR heterogeneous, fiberglass reinforced
Plastics basis			Polyvinylchloride
Surface			different embossings

Safety Criteria

Flammability	EN 13501-1	class	B _n - s1
Slip resistance	BGR 181	group	R 9
Dynamic coefficient of friction	EN 13893	class	DS
Impact sound reduction	ISO 140-8	dB	9

General properties

Tiles: side length	EN 427	cm	91,4 x 15,2
Overall thickness	EN 428	mm	5,00
Thickness of wear layer	EN 685	mm	0,55
Total weight	EN 430	g / m ²	8000
Residual indentation	EN 433	mm	app. 0.04
Colour fastness	ISO 105-B02	rating	≥ 6
Wear group	EN 649		T
Vertical resistance	EN 1081	Ohm	-
Electrical insulation to ground	VDE 0100	kOhm	> 200
Static electrical charge	EN 1815	kV	app. 2.0(antistatic)
Thermal resistance	EN 12667	m ² K / W	0.070
Thermal conductivity	EN 12524	W/ m K	0. 25
Furniture leg	EN 424		No damage
Castor chair	EN425		No damage
Chemical resistance	EN 423		High resistance





**00271 Handscraped
Light Brown**



**00275 Handscraped
Dark Brown**





00326 Dove Grey



3902 Pine Natural



63937 Western Grey

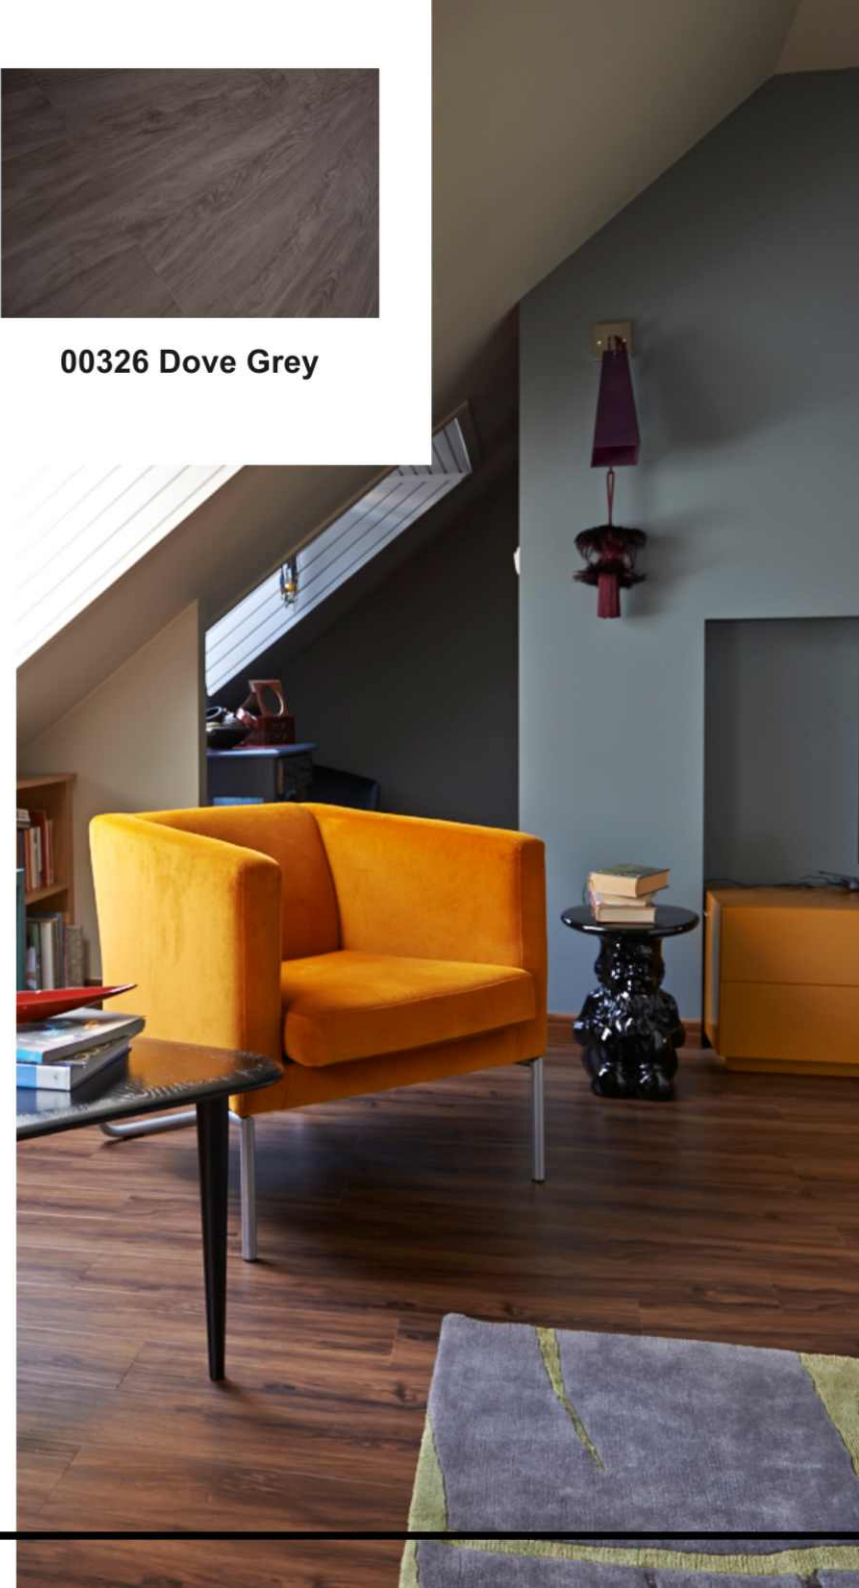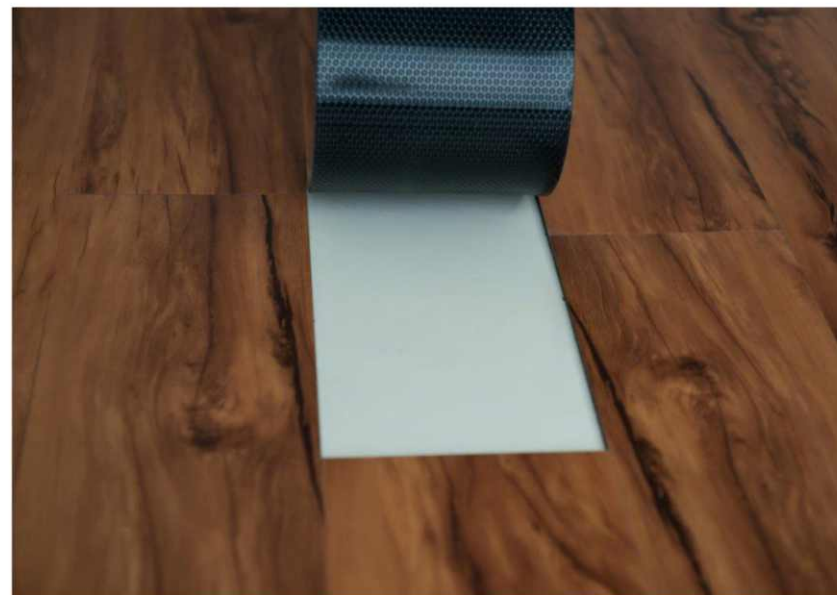

VINYL FLOORS