

Standard 35 Selection

The **Magicfloor Standard35** vinyl collection offers versatile solutions primarily for medium-traffic areas and home applications. Besides the low cleaning and maintenance costs, its longevity and easy installation also provide several advantages. This environmentally friendly flooring type with its wooden patterns guarantees not only comfort but also a variety of design possibilities for any interiors.

Specification according to EN 649


Characteristics	Standard	Unit	Result
Type of flooring	EN 649		synthetic floor covering with PUR heterogeneous, fiberglass reinforced
Plastics basis			Polyvinylchloride
Surface			different embossings

Safety Criteria

Flammability	EN 13501-1	class	B _n - s1
Slip resistance	BGR 181	group	R 9
Dynamic coefficient of friction	EN 13893	class	DS
Impact sound reduction	ISO 140-8	dB	9

General properties

Tiles: side length	EN 427	cm	91,4 x 15,2
Overall thickness	EN 428	mm	2.00
Thickness of wear layer	EN 685	mm	0,35
Total weight	EN 430	g / m ²	3400
Residual indentation	EN 433	mm	app. 0.04
Colour fastness	ISO 105-B02	rating	≥ 6
Wear group	EN 649		T
Vertical resistance	EN 1081	Ohm	-
Electrical insulation to ground	VDE 0100	kOhm	> 200
Static electrical charge	EN 1815	kV	app. 2.0(antistatic)
Thermal resistance	EN 12667	m ² K / W	0.070
Thermal conductivity	EN 12524	W/ m K	0. 25
Furniture leg	EN 424		No damage
Castor chair	EN425		No damage
Chemical resistance	EN 423		High resistance

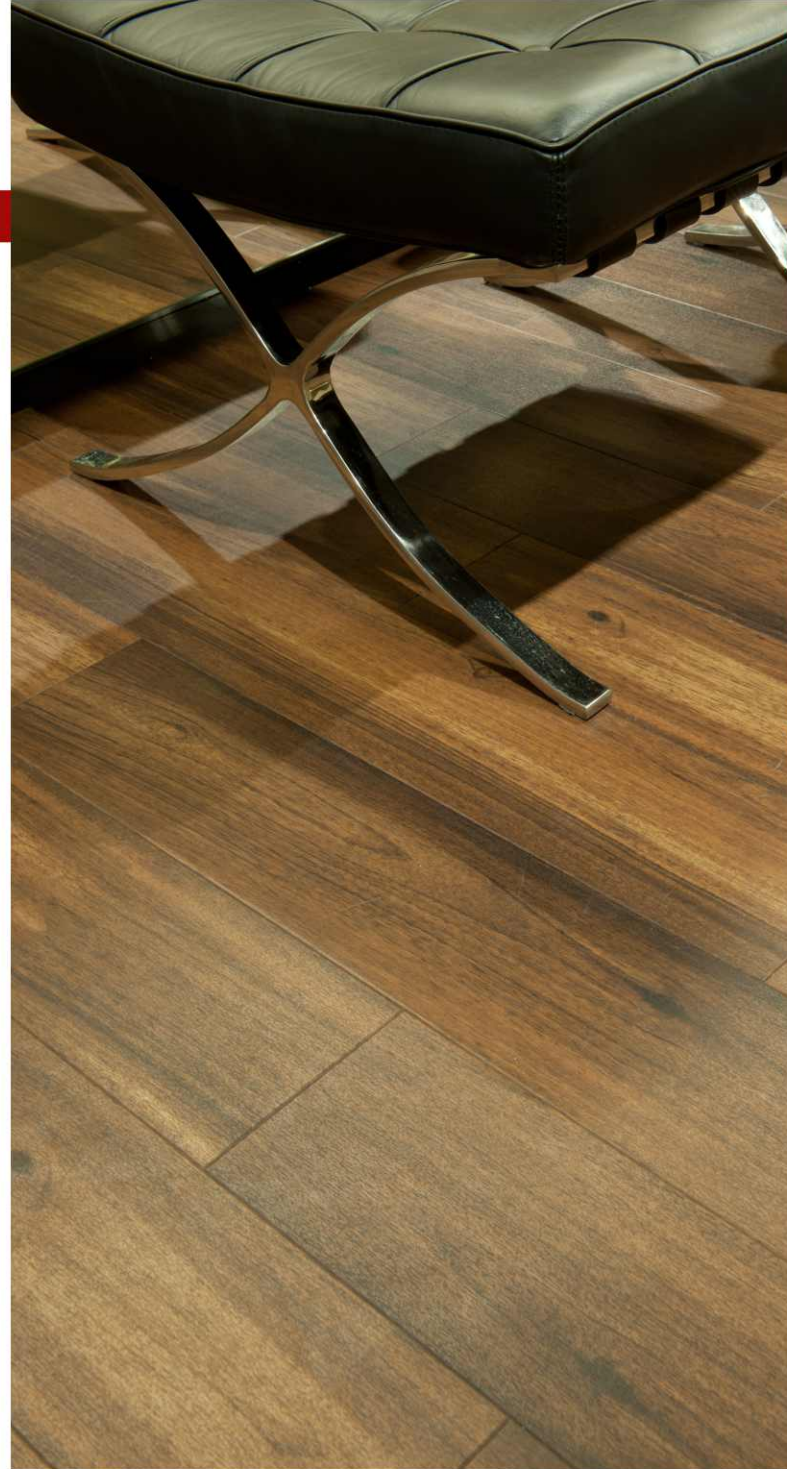



00102 Oak Classic



00321 Chalky Grey



3902 Pine Natural Light



6002 Pine Rustic Brown



7172 American Walnut

